



Accurate Machines was established in the year 1995, a unit specialized in the manufacturing of Fully Automatic Blister Packing Machines. Manufacturing plant having total area of 74000 Sq. Ft.

Over the years, the infra structural strengths have been consolidated in a manner that allows for maximum self-reliance. Quality inputs, precision engineering, continuous improvement and customer's encouragement gives us the right to address our products as RELIABLE TO THE CORE.

More than 15 various machine models for Formulation & Injectable sections.

Note: Would be happy to provide Injectables catalogue, if required. Please let us know.

1700+ Installations Globally
covering 45 countries

ACCURATE MACHINES

422, GIDC Industrial Estate, Waghodia-391 760, Dist. Vadodara. INDIA
M: +91 9327240265 / +91 9662176666 E: info@accurateblister.com

www.accurateblister.com

Volume 1, 2024



blister packing for form and function



Formulations
Injectables

www.accurateblister.com



240 PLUS



Utilities Requirement

Compressed Air	7 CFM dry air at pressure of 6.0 kg/cm ²
Water Cooler	150 liters/hour Temperature 15 ^o C to 20 ^o C @pressure 2.5 kg/cm ²
Electrical Power	7.5 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm ² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Thermo-Form Blister Packing Machines

Technical Specification

PVC Base Film Width	210 mm Max.
PVC Base Film Thickness	0.25 - 0.4 mm Max.
Sealing Foil Width	206 mm Max.
Sealing Foil Thickness	0.02 - 0.04 mm Max.
Format Area	210 mm X 100 mm
Forming Depth	16 mm
Max. Output	Round Shape 240 packs/min & Oval Shape 140 packs/min
Machine Dimensions in mm.	L: 2900 W: 1100 H: 1800
Machine Weight	1150 kg. (Approx)


Unmatchable - Technology

Uncomparable - Performance



Thermo-Form Blister Packing Machines

250 EVO

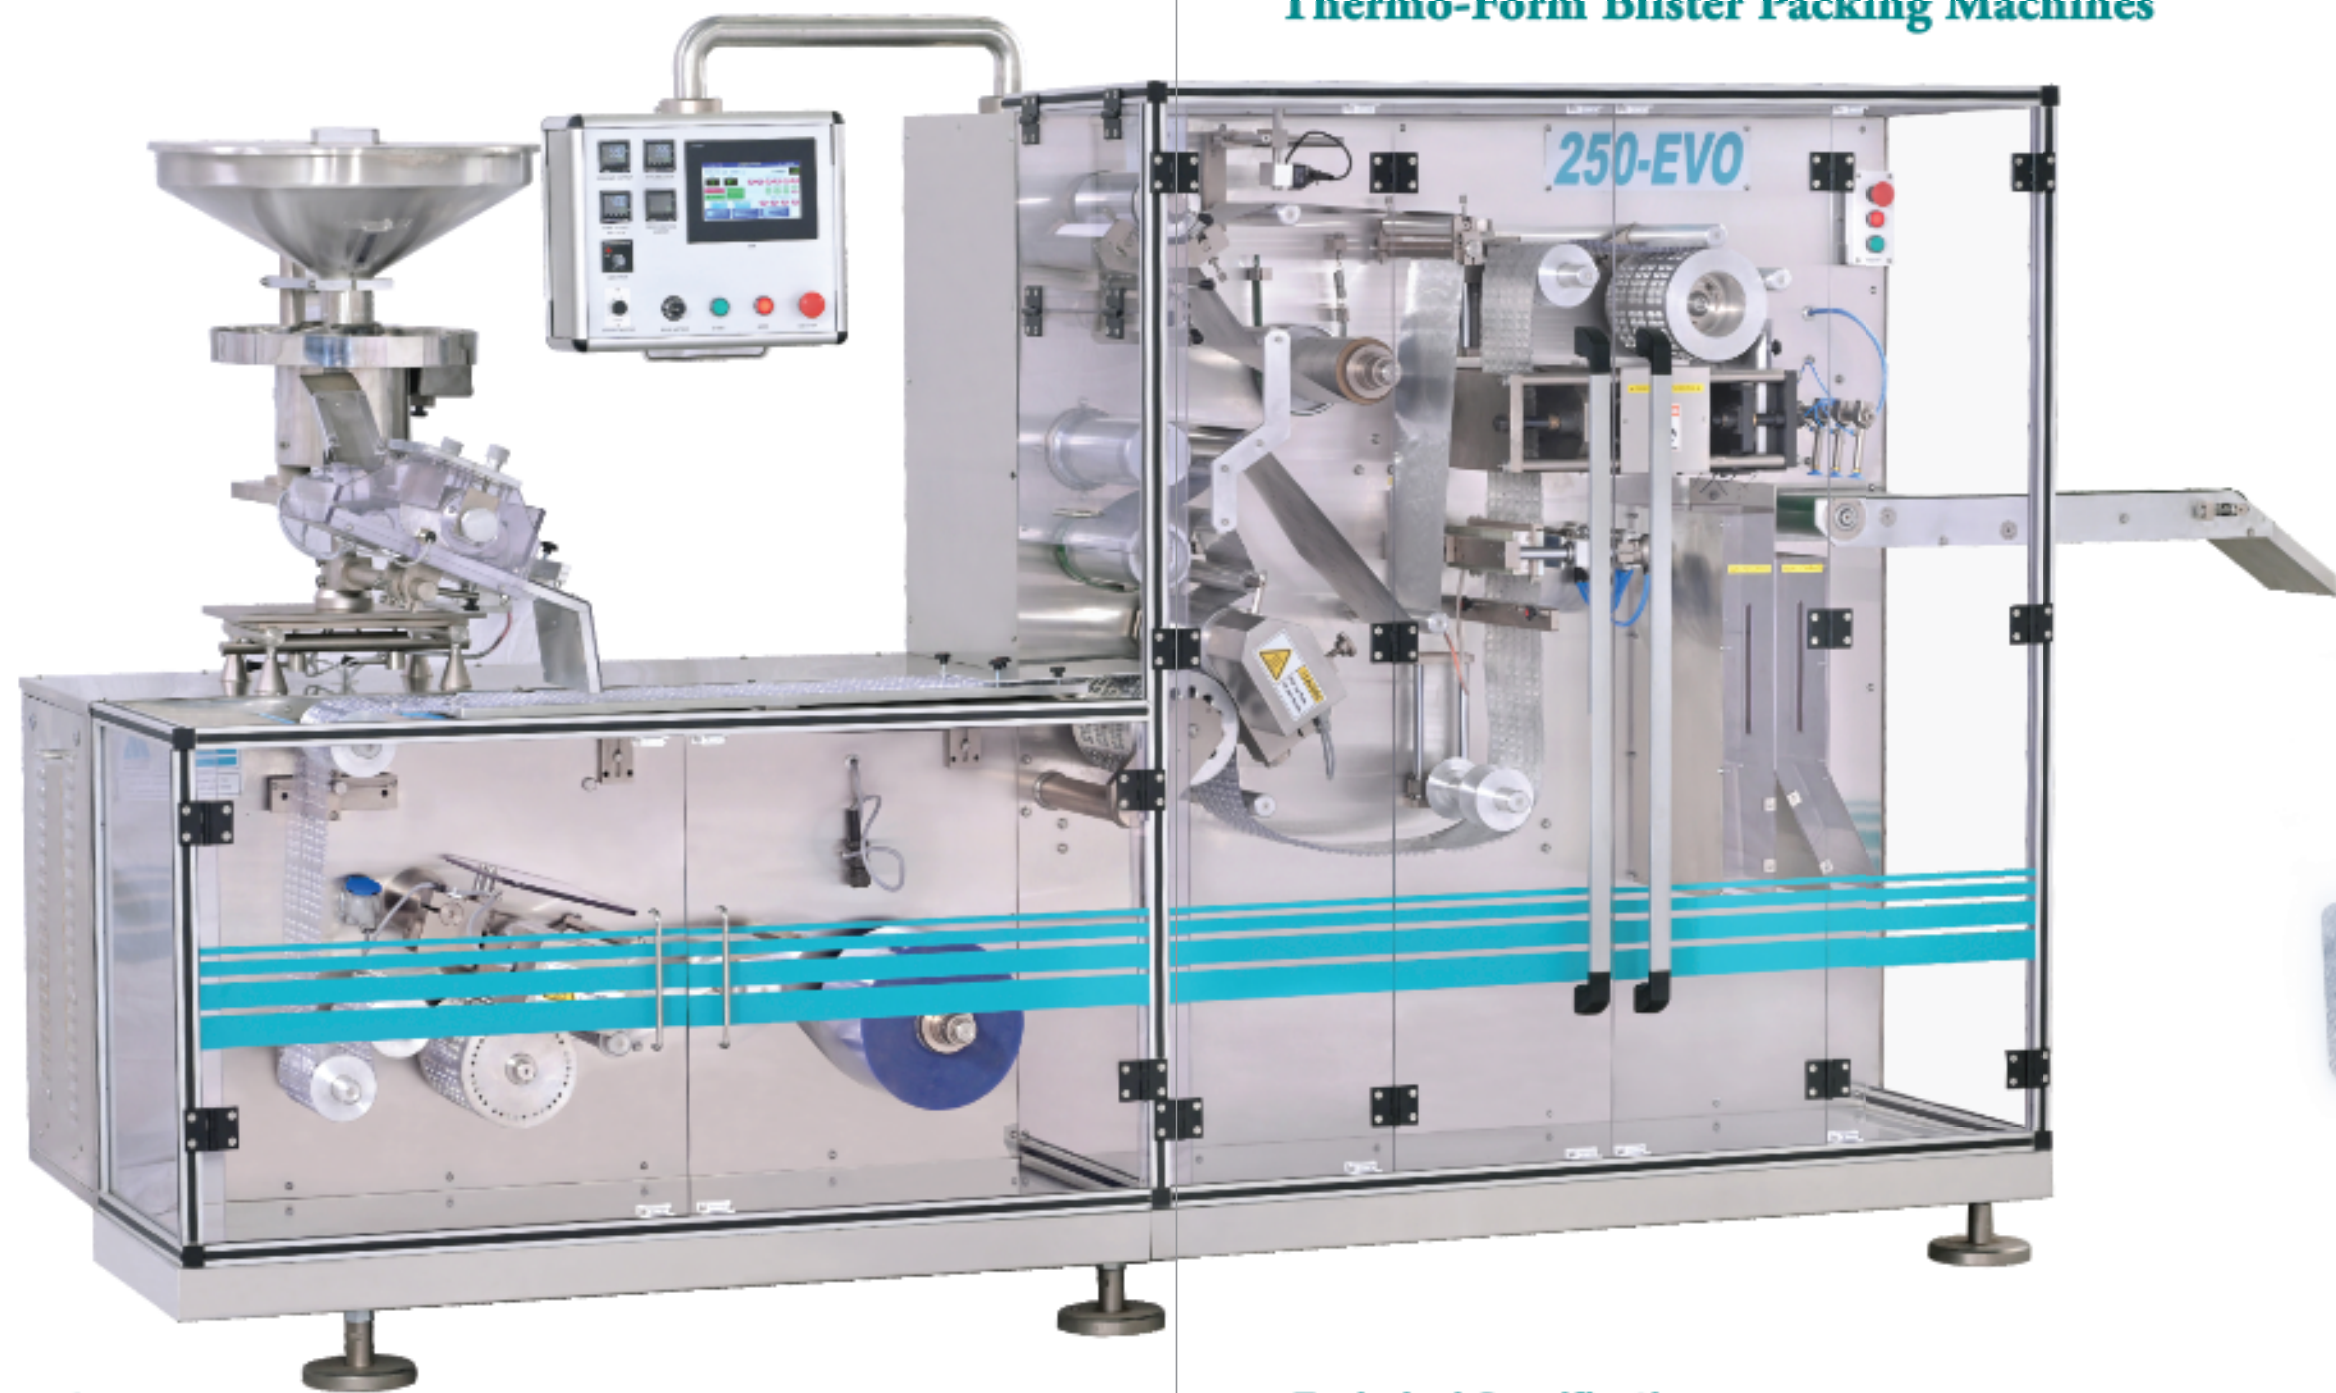

Utilities Requirement

Compressed Air	11 CFM dry air at pressure of 6.0 kg/cm ²
Water Cooler	150 liters/hour Temperature 15 ⁰ C to 20 ⁰ C @pressure 2.5 kg/cm ²
Electrical Power	8.5 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm ² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

PVC Base Film Width	238 mm Max.
PVC Base Film Thickness	0.25 - 0.4 mm Max.
Sealing Foil Width	234 mm Max.
Sealing Foil Thickness	0.02 - 0.04 mm Max.
Format Area	238 mm X 100 mm
Forming Depth	16 mm
Max. Output	Round Shape 240 packs/min & Oval Shape 210 packs/min
Machine Dimensions in mm.	L: 3700 W: 1150 H: 1800
Machine Weight	1550 kg. (Approx)


Unmatchable - Technology

Uncomparable - Performance



High Speed Flat Forming-Rotary Sealing Thermo-form Blister Packing Machine

300 FBR

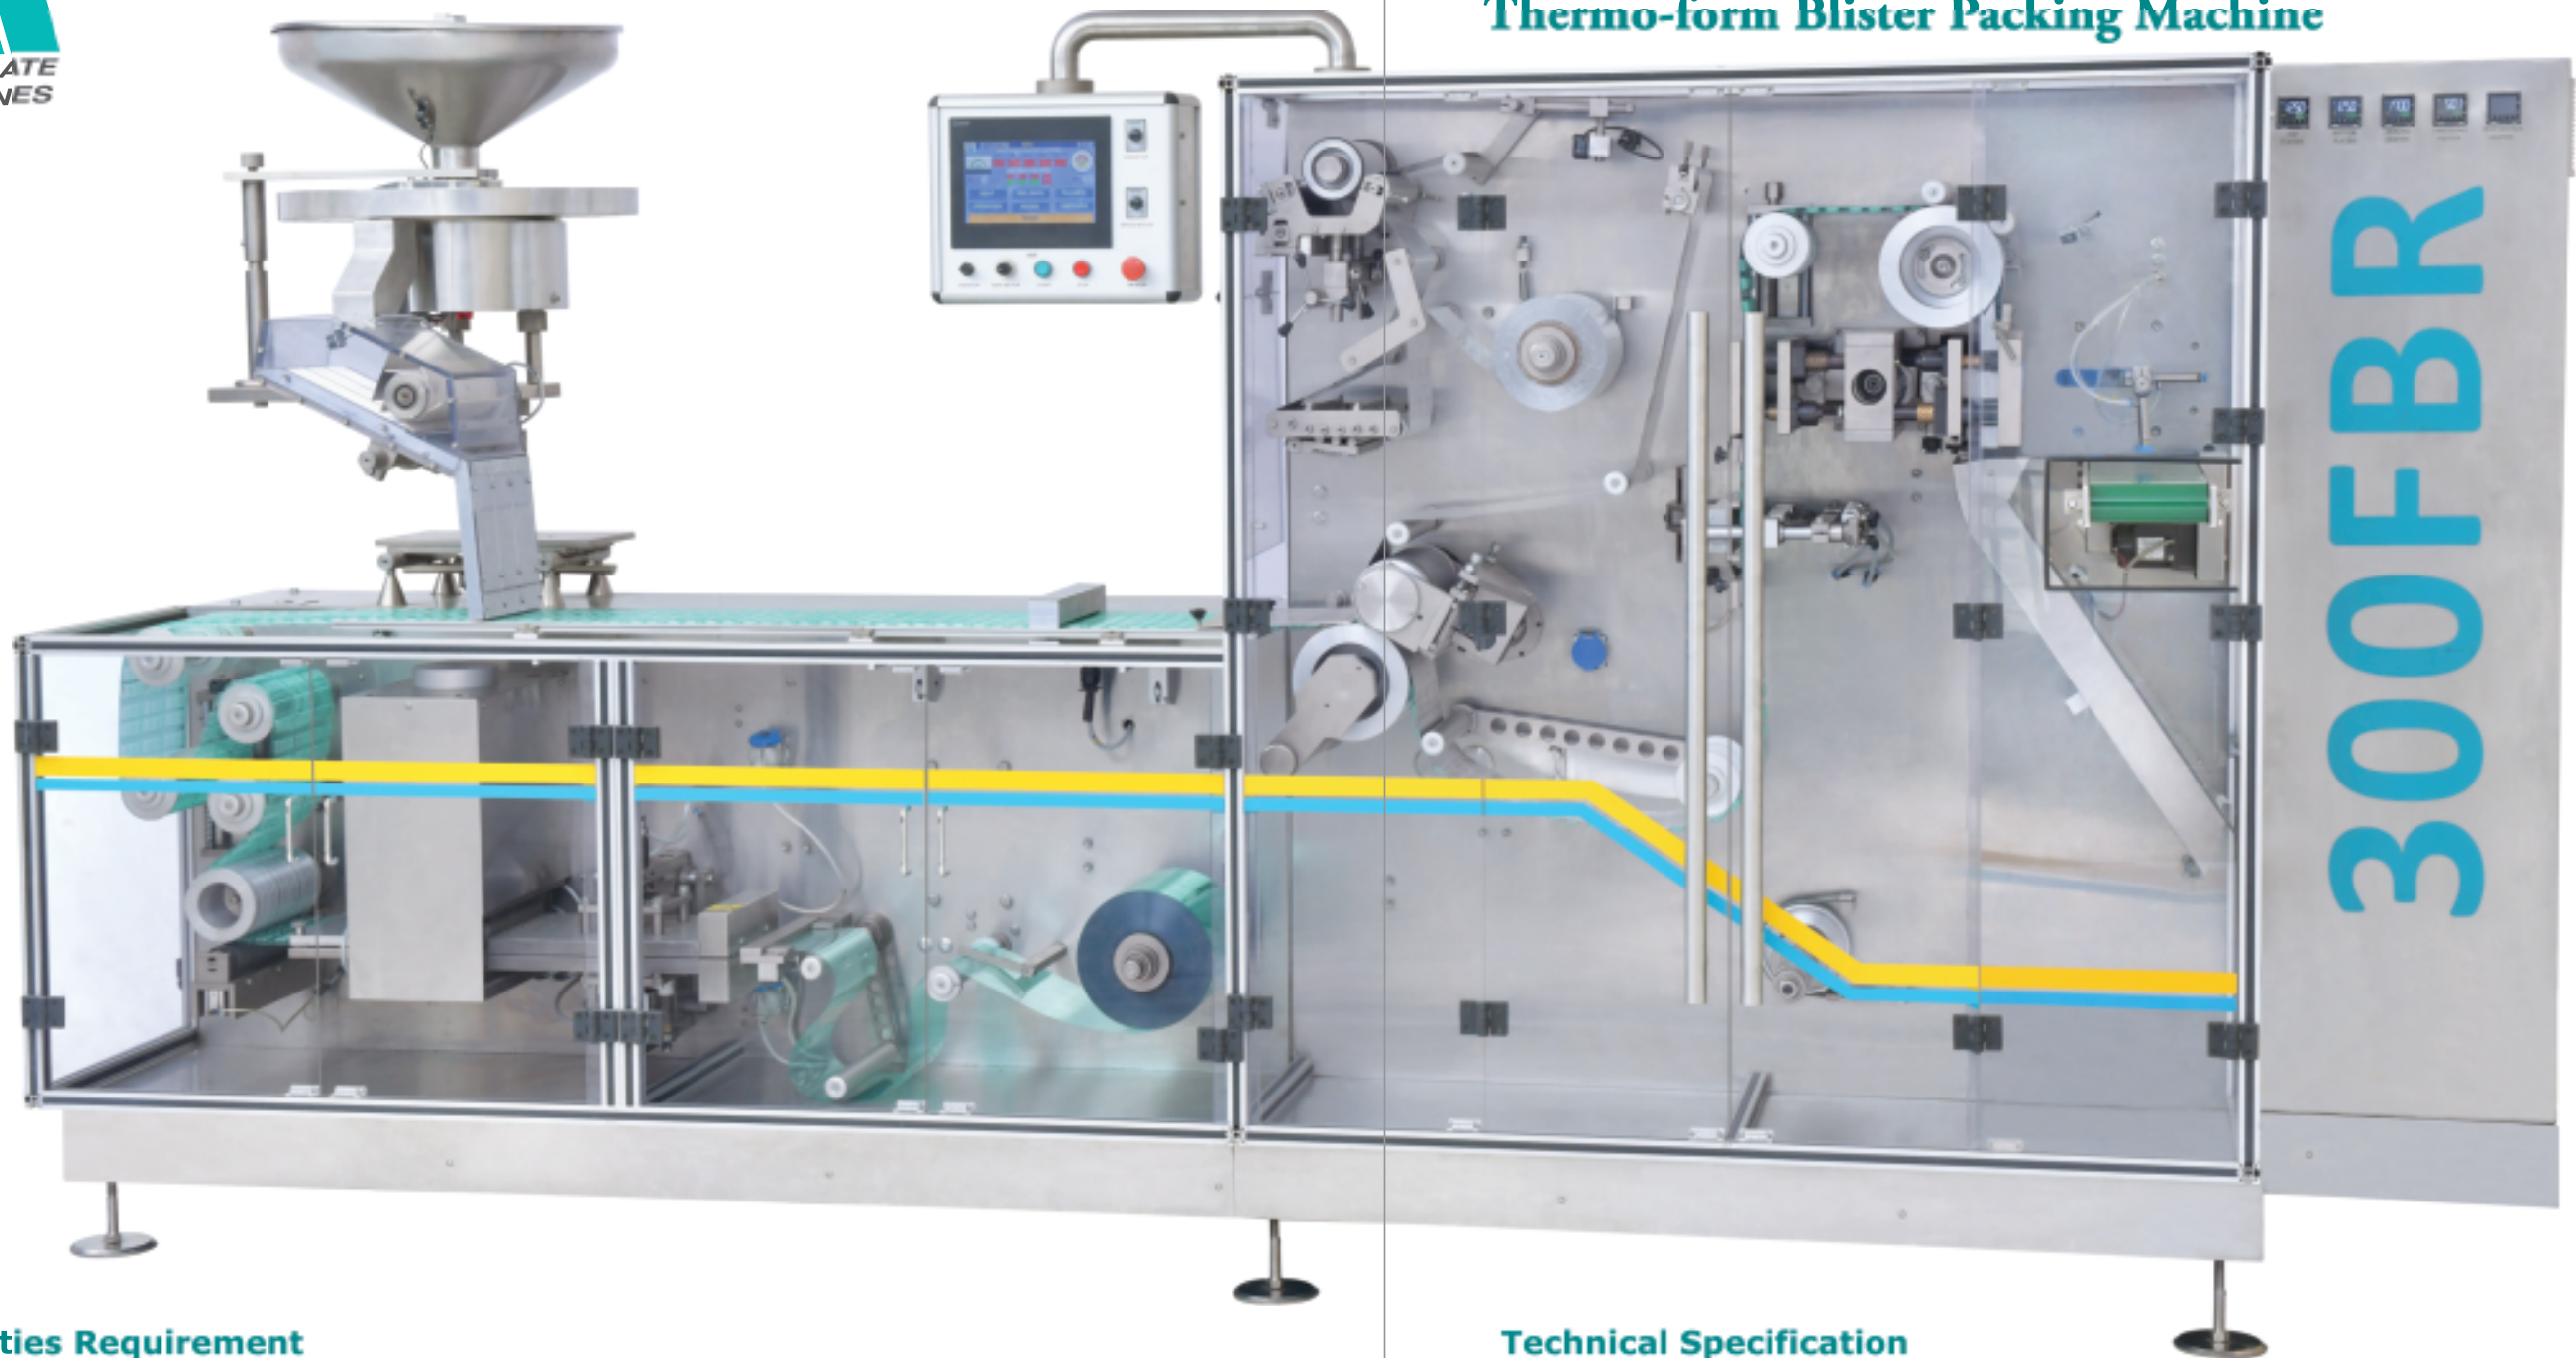

Utilities Requirement

Compressed Air	17 CFM dry air at pressure of 6.0 kg/cm ²
Water Cooler	150 liters/hour Temperature 15 ⁰ C to 20 ⁰ C @pressure 2.5 kg/cm ²
Electrical Power	11 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm ² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

PVC Base Film Width	227 mm Max.
PVC Base Film Thickness	0.25 - 0.4 mm Max.
Sealing Foil Width	227 mm Max.
Sealing Foil Thickness	0.02 - 0.04 mm Max.
Format Area	227 mm X 180 mm
Forming Depth	12 mm
Max. Output	315 packs/minutes
Machine Dimensions in mm.	L: 4700 W: 1200 H: 1950
Machine Weight	2100 kg. (Approx)

Unmatchable - Technology

Uncomparable - Performance



Ideally designed for:
Small & medium batches.
R & D departments.
Clinical trials.

Utilities Requirement

Compressed Air	27 CFM dry air at pressure of 8.0 kg/cm ²
Water Cooler	150 liters/hour Temperature 15 ⁰ C to 20 ⁰ C @pressure 2.5 kg/cm ²
Electrical Power	5.0 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm ² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP/ALU-ALU.
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

	Cold-forming	Thermo-forming
Base Film Width Max.	Alu. Foil 150 mm	Pvc Film 150 mm
Base Film Thickness Max.	Alu. 0.13 - 0.15 mm	Pvc 0.20 - 0.40 mm
Base Film Reel Dia.	Alu. 440 mm	Pvc 440 mm
Sealing Foil Thickness Max.	0.02 - 0.04 mm	0.02 - 0.04 mm
Format Area	150 mm X 100 mm	150 mm X 100 mm
Forming Depth	12 mm	12 mm
Max. Output	35 strokes/minutes	35 strokes/minutes
Machine Dimensions in mm.	L: 3000 W: 1300 H: 1700	
Machine Weight	1050 kg. (Approx)	



Utilities Requirement

Compressed Air	17 CFM dry air at pressure of 6.0 kg/cm ²
Water Cooler	150 liters/hour Temperature 15 ^o C to 20 ^o C @pressure 2.5 kg/cm ²
Electrical Power	10 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm ² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP/ALU-ALU.
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

	Cold-forming	Thermo-forming
Base Film Width Max.	Alu. Foil 227 mm	Pvc Film 227 mm
Base Film Thickness Max.	Alu. 0.13 - 0.15 mm	Pvc 0.20 - 0.40 mm
Base Film Reel Dia.	Alu. 440 mm	Pvc 440 mm
Sealing Foil Thickness Max.	0.02 - 0.04 mm	0.02 - 0.04 mm
Format Area	227 mm X 140 mm	227 mm X 140 mm
Forming Depth	12 mm	12 mm
Max. Output	35 strokes/minutes	35 strokes/minutes
Machine Dimensions in mm.	L: 4250 W: 1100 H: 1900	
Machine Weight	2100 kg. (Approx)	



Utilities Requirement

Compressed Air	7 CFM dry air at pressure of 6.0 kg/cm²
Water Cooler	120 liters/hour Temperature 15 ⁰ C to 20 ⁰ C @pressure 2.5 kg/cm²
Electrical Power	5.5 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm² (Minimum)

Packaging Materials

Base Material	PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

PVC Base Film Width	110 mm Max.
PVC Base Film Thickness	0.25 - 0.4 mm Max.
PVC Reel Dia.	440 mm Max.
Sealing Foil Width	106 mm
Format Area	110 mm X 100 mm
Forming Depth	16 mm
Max. Output	Round Shape 140 packs/min
Machine Dimensions in mm.	L: 2300 W: 950 H: 1800
Machine Weight	950 kg. (Approx)



Unique design for special purpose of having ALU/ALU Deep cavities

Cold-form & Thermo-form Blister Packing Machine

Combo 2030



Utilities Requirement

Compressed Air	35 CFM dry air at pressure of 8.0 kg/cm²
Water Cooler	150 liters/hour Temperature 15°C to 20°C @pressure 2.5 kg/cm²
Electrical Power	10.5 kW, 415 V, 50 Hz, 3 Phase + N+E.
Earthing Cable	Copper 2.5 mm² (Minimum)

Packaging Materials

Base Material	ALU-ALU/PVC/PVC-PVDC/ACCLAR/TRIPLEX/PP.
Lidding Material	Aluminum with Heat Sealable Lacquer Coating.

Technical Specification

	Cold-forming	Thermo-forming
Base Film Width Max.	Alu. Foil 190 mm	Pvc Film 180 mm
Base Film Thickness Max.	Alu. 0.13 - 0.24 mm	Pvc 0.20 - 0.50 mm
Base Film Reel Dia.	Alu. 560 mm	Pvc 560 mm
Sealing Foil Thickness Max.	0.02 - 0.04 mm	0.02 - 0.04 mm
Format Area	190 mm X 140 mm	180 mm X 140 mm
Forming Depth	20 mm	26 mm
Max. Output	30 strokes/minutes	30 strokes/minutes
Machine Dimensions in mm.	L: 4570 W: 1800 H: 2150	
Machine Weight	2200 kg. (Approx)	

Unmatchable - Technology

Uncomparable - Performance